

No. 00823-100 TRIPLE SIDEWINDER® VOLLEYBALL NET STORAGE SYSTEM ASSEMBLY INSTRUCTIONS

PARTS LIST – No. 00821-100					
No.	Qty.	DESCRIPTION	No.	Qty.	DESCRIPTION
1	1	BASE FRAME	11	8	WASHER
2	1	UPRIGHT WELDMENT	12	4	HEX NUT
3	1	UPPER SUPPORT TUBE	13	3	SET SCREW
4	3	NET HOLDER	14	1	CRANK ASSEMBLY
5	4	4" SWIVEL CASTER			
6	3	NET HOLDER BOLT			
7	6	NET HOLDER WASHER			
8	3	NET HOLDER NUT			
9	2	2-1/4" Lg. MACHINE BOLT			
10	2	1-1/2" Lg. MACHINE BOLT			

Detail "A"




TOOLS NEEDED

- #3 HEX KEY
- 2 CRESCENT WRENCHES

1. Unpack all parts and check against parts list to ensure that all have been included.
2. Assemble four 4" swivel casters (5) into base frame (1).
3. Assemble upright weldment (2) to base frame (1) using 2 1/4" lg. machine bolt (9), washer (11) and hex nut (12).
4. Assemble upper support tube assembly from Step No. 3 to the upper support tube (3) using two 1 1/2" lg. machine bolts (10), washers (11) and hex nuts (12).
5. Assemble net holders (4) to the upper support tube (3) using net holder bolts (6), two net holder washers (7) and net holder nut (8). See Detail "B" for proper location of all parts. Tighten nut (8) until snug - do not overtighten, as net holder (4) must be allowed to spin freely, without wobble.
6. Secure net holder (4) to net holder bolt (6) using the set screw (13).
7. Check operation of net holders (4) with crank assembly (14). Net holders should spin freeley, but without any wobble. Tighten or loosen nuts (8) from Step No. 5 as required.

Detail "B"

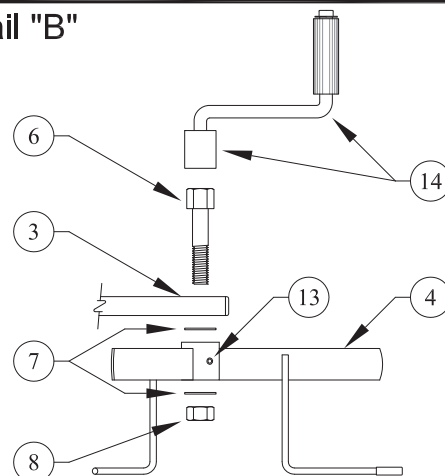

THE OWNER OF THIS EQUIPMENT MUST SAVE
THESE INSTRUCTIONS FOR FUTURE REFERENCE

WARNING: This product can expose you to Titanium Dioxide, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

E