




1. REMOVE THE BROKEN TOP CABLE

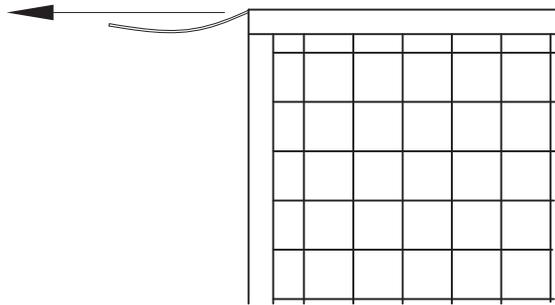


2. INSERT THE REPAIR TOOL WORKING IT THROUGH THE TOP HEM

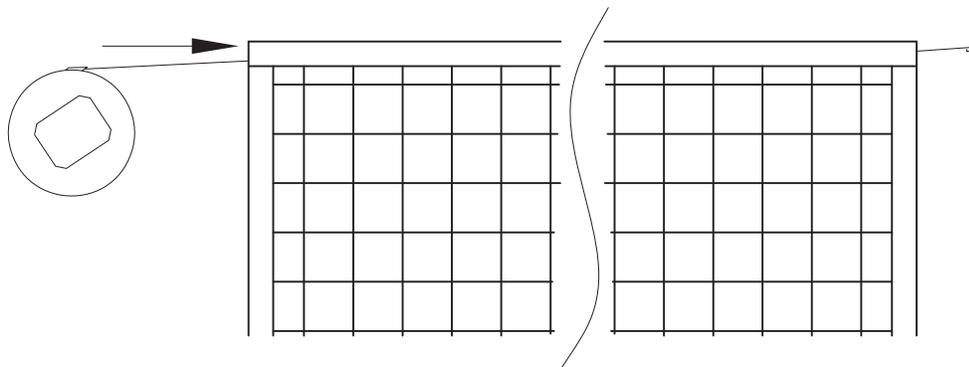

3. ATTACH NEW TOP CABLE TO THE REPAIR TOOL

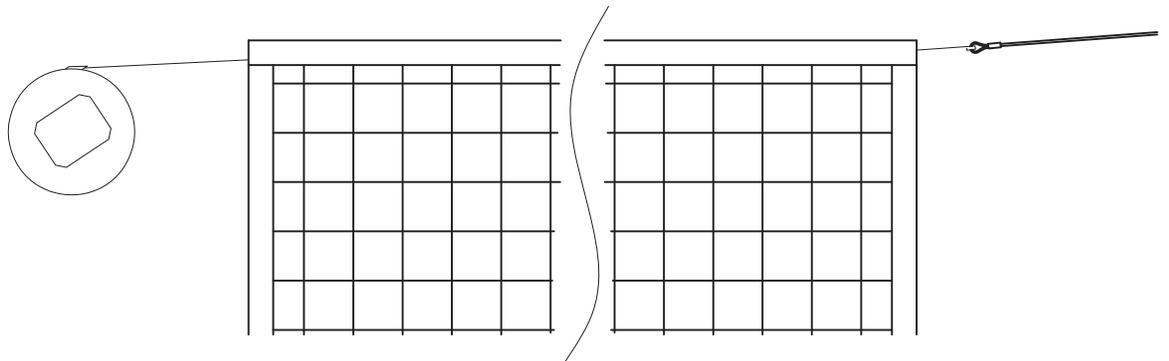

4. RETRACT THE REPAIR TOOL UNTIL TOP CABLE IS ALL THE WAY THROUGH

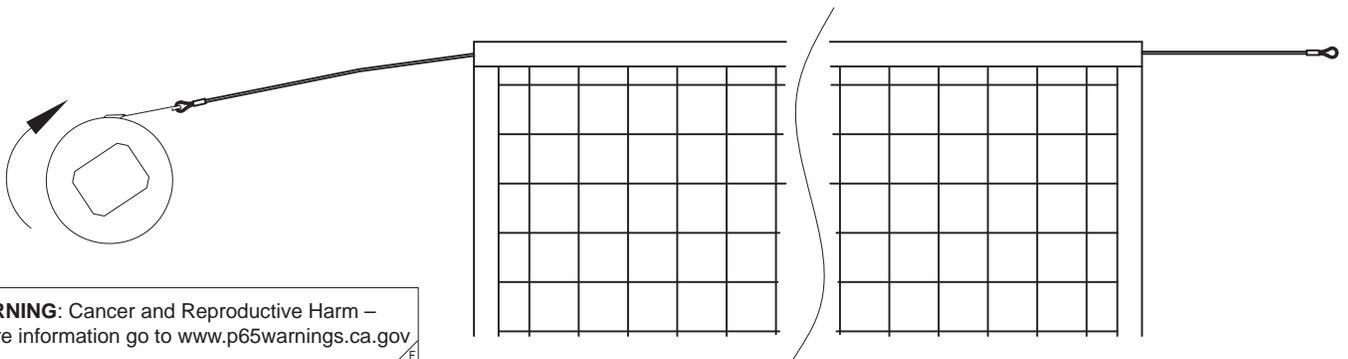

WARNING: Cancer and Reproductive Harm –
For more information go to www.p65warnings.ca.gov