


# 236054 - ULTRA-FLEX II GOAL

WITH TUBE TIE NET ATTACHMENT, MOUNTING HARDWARE, AND NET  
QUALIFIES AS 245500 ULTRA-FLEX GOAL EQUIVALENT

porter  
WWW.PORTERATHLETIC.COM/FACILITY

## BASKETBALL SPECIFICATION SHEET

B-236054

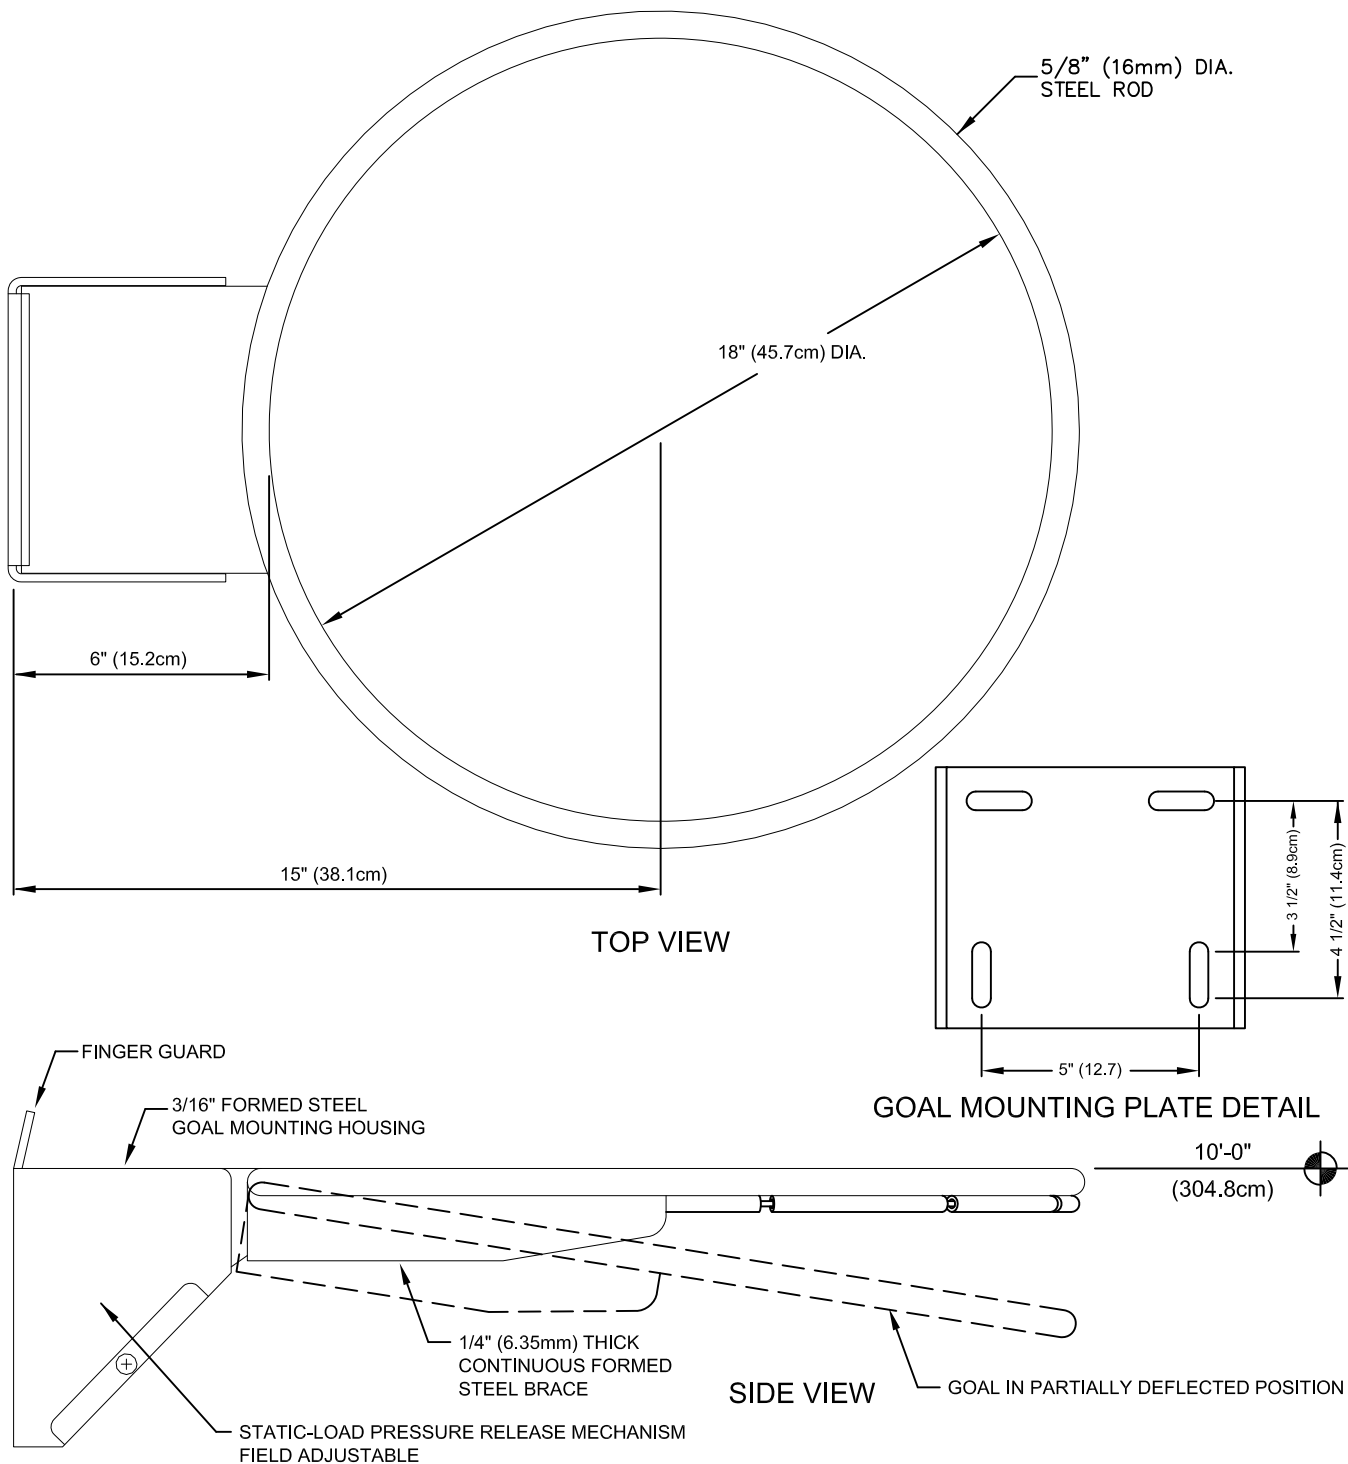

- 236054 ULTRA-FLEX II GOAL WITH HARDWARE AND NET  
SEE B-200 FOR COMPATABLE BACKBOARDS

porter®

888-277-7778 PORTER@PORTERATHLETIC.COM  
© COPYRIGHT 2017 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

10/20/2017

# 236054 - ULTRA-FLEX II GOAL

WITH TUBE TIE NET ATTACHMENT, MOUNTING HARDWARE, AND NET

## SPECIFICATIONS

Goal shall be designed to absorb shock loads due to slam dunking or hanging on the rim.

Goal shall incorporate a positive lock, pressure release mechanism which is preset to provide rebound characteristics identical to those of a non-movable ring. Static-load pressure release mechanism shall be field-adjustable to increase or decrease breakaway force. After release and with the load no longer applied, the ring shall return automatically and instantaneously to the original, playing position.

Rim shall be fabricated from 5/8" diameter cold drawn alloy steel, round formed to an 18" inside diameter ring. Inside diameter of ring shall be positioned 6" from face of backboard by a heavy formed steel, hinged type housing with a removable cover to conceal mounting bolts and spring mechanisms of goal, and also protect against finger entrapment. Goal mounting plate shall be provided with hardware and a 5" x 4" mounting hole pattern for front mounting on standard glass, wood and fiberglass type backboards and is also compatible for use with all Center-Strut direct mount type support frames.

Rim shall be rigidly braced by means of a formed steel brace welded in position on the underside of the rim for maximum support. Rim shall be provided with a unique "tube-tie" net attachment system to eliminate the conventional wire-formed type net locks for additional player safety.

Goal shall be furnished in a durable, official orange powder-coat finish.

Goal shall be furnished complete with plated mounting hardware and an anti-whip net.

Goal shall meet equal functional specifications than 245-500 Ultra-Flex goal.

For details on compatible backboards see B-200.

## WARRANTY

- 236054 goal furnished with a 5-year limited warranty.

## OPTIONAL ITEMS (SEE SPECIFICATION SHEETS FOR DETAIL)

- Fair-Court Basketball Rim Testing System (ERT2003NCAA)
- RING001 - Training aid shooters ring
- RING002 - Training aid rebound ring